








GROVE - RT 422 - 22 TN

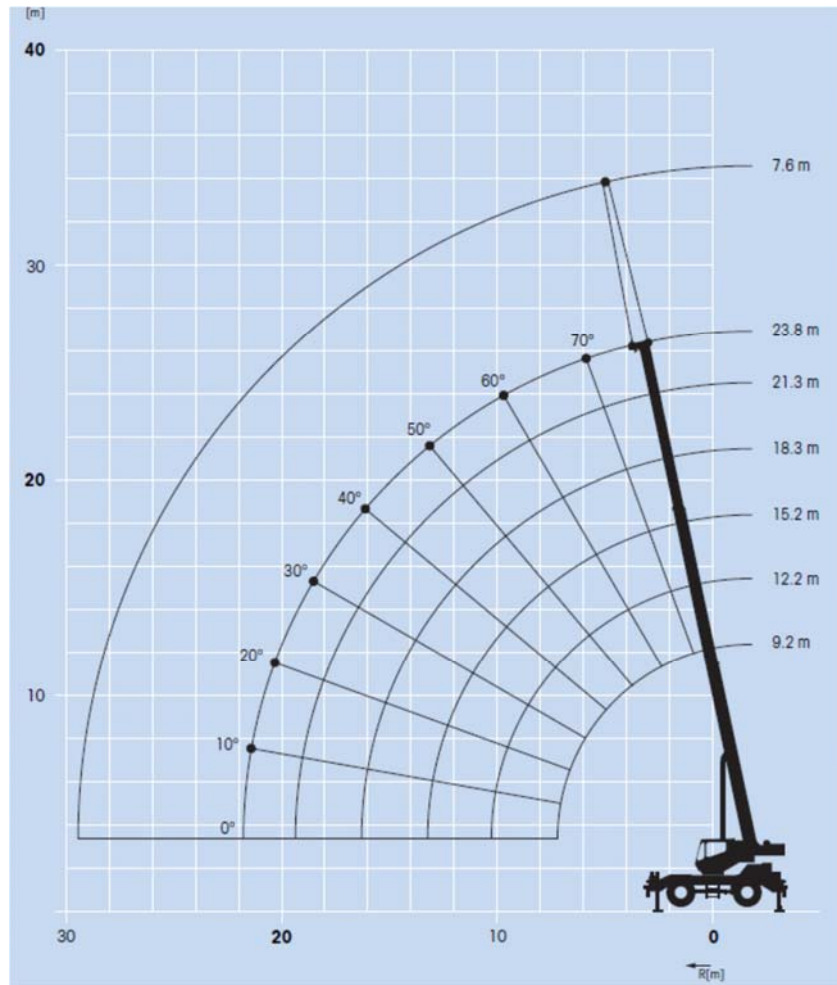

	9.2 – 23.8 m		100%		360°		2,585 kg
	 BS/DIN						
m	9.2	12.2	15.2	18.3	21.3	23.8	23.8 +7.6 ext
3.0	20,000	19,425	17,750	14,250			
3.5	18,425	17,925	16,725	14,250			
4.0	16,450	16,200	15,625	13,650			
4.5	14,475	14,450	14,525	12,750	11,475	7,345	
5.0	13,050	13,125	13,325	12,025	10,925	7,345	
6.0	10,425	10,675	10,850	10,675	9,645	7,345	5,665
7.0	6,090	8,905	9,020	9,105	8,580	6,565	5,370
8.0		7,410	7,490	7,675	7,515	5,795	5,035
9.0		6,265	6,375	6,515	6,415	5,170	4,675
10.0		4,030	5,395	5,430	5,460	4,670	4,445
12.0			3,810	3,810	3,860	3,850	3,810
14.0				2,780	2,840	2,900	3,175
16.0				2,050	2,135	2,200	2,450
18.0					1,610	1,685	1,915
20.0						1,290	1,500
22.0							1,175
24.0							915
26.0							695
28.0							510

A6-829-015910