


750

EFFER


750



Standard



Optional



4S

	22000	15760	11190	8560	6890	5740	kg
	2.92	4.33	6.07	7.87	9.74	11.68	m
7055 kg	48500	34740	24665	18870	15185	12650	lb
15550 lb	9'6"	14'2"	19'10"	25'9"	31'11"	38'3"	ft

6S

	21400	14770	10525	7820	6190	5050	4235	3655	kg
	2.92	4.48	6.23	8.03	9.89	11.84	13.88	16.01	m
7665 kg	47175	32560	23200	17235	13645	11130	9335	8055	lb
16895 lb	9'6"	14'8"	20'5"	26'4"	32'5"	38'10"	45'6"	52'6"	ft

8S

	20270	13700	9620	7160	5570	4390	3610	3060	2670	2320	kg
	2.92	4.68	6.43	8.23	10.09	12.04	14.08	16.22	18.42	20.68	m
8215 kg	44685	30200	21205	15780	12275	9675	7955	6745	5885	5110	lb
18110 lb	9'6"	15'4"	21'1"	27'	33'1"	39'6"	46'2"	53'2"	60'5"	67'10"	ft

9S

	18960	12500	8790	6560	5070	4070	3350	2850	2430	2160	1720	kg
	2.92	4.75	6.50	8.30	10.16	12.10	14.14	16.28	18.48	20.75	23.10	m
8460 kg	41795	27555	19375	14460	11175	8970	7385	6280	5355	4760	3790	lb
18650 lb	9'6"	15'7"	21'3"	27'2"	33'3"	39'8"	46'4"	53'4"	60'7"	68'	75'9"	ft

4S+JIB 4S



	3180	2840	2550	2320	2130	kg
	14.69	16.13	17.70	19.31	20.94	m
8415 kg	7010	6260	5620	5110	4695	lb
18550 lb	48'2"	52'11"	58'	63'4"	68'8"	ft

	8500	5750	4000	3030	2450	kg
	6.46	7.90	9.47	11.00	12.71	m
	18735	12675	8815	6675	5400	lb
	21.2"	25.11"	31'	36'1"	41,8"	ft



MODEL							
	txm	(°)	mm	mm	mm	mm	t
4S	68,24	580	2485	2500	1740	8710	26 - 32
6S	66,17	580	2485	2500	1775	8710	26 - 32
8S	64,12	580	2485	2500	1775	8710	26 - 32
9S	59,37	580	2485	2550	1775	8710	26 - 32
4S+JIB 4S	68,24	580	2670	2500	1990	8710	26 - 32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
4S	493750	580	98	98	69	343	57300 70500
6S	478770	580	98	98	70	343	57300 70500
8S	463940	580	98	98	70	343	57300 70500
9S	429570	580	98	100	70	343	57300 70500
4S+JIB 4S	493750	580	105	98	78	343	57300 70500



6S+JIB 4S LIGHT





6S+JIB 4S HEAVY DUTY





6S+JIB 6S LIGHT

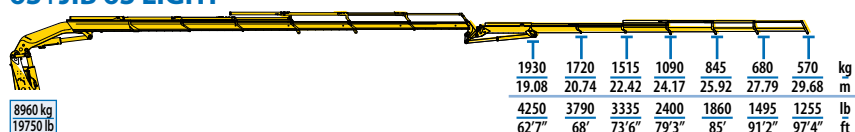



6S+JIB 6S HEAVY DUTY

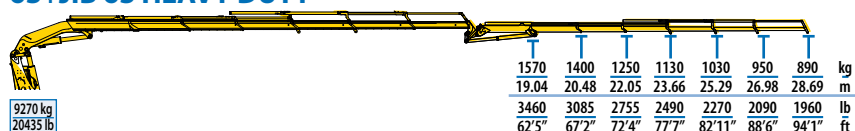

8S+JIB 4S



8S+JIB 6S



750

MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S+JIB 4S LIGHT	66,17	580	2670	2500	1990	8710	26-32
6S+JIB 4S HD	66,17	580	2670	2500	1990	8710	26-32
6S+JIB 6S LIGHT	66,17	580	2670	2500	1990	8710	26-32
6S+JIB 6S HD	66,17	580	2670	2500	1990	8710	26-32
8S+JIB 4S	64,12	580	2670	2500	1990	8710	26-32
8S+JIB 6S	64,12	580	2670	2500	1990	8710	26-32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S+JIB 4S LIGHT	478770	580	105	98	78	343	57300 70500
6S+JIB 4S HD	478770	580	105	98	78	343	57300 70500
6S+JIB 6S LIGHT	478770	580	105	98	78	343	57300 70500
6S+JIB 6S HD	478770	580	105	98	78	343	57300 70500
8S+JIB 4S	463940	580	105	98	78	343	57300 70500
8S+JIB 6S	463940	580	105	98	78	343	57300 70500