

TABLA DE CARGAS XCMG QY75BR

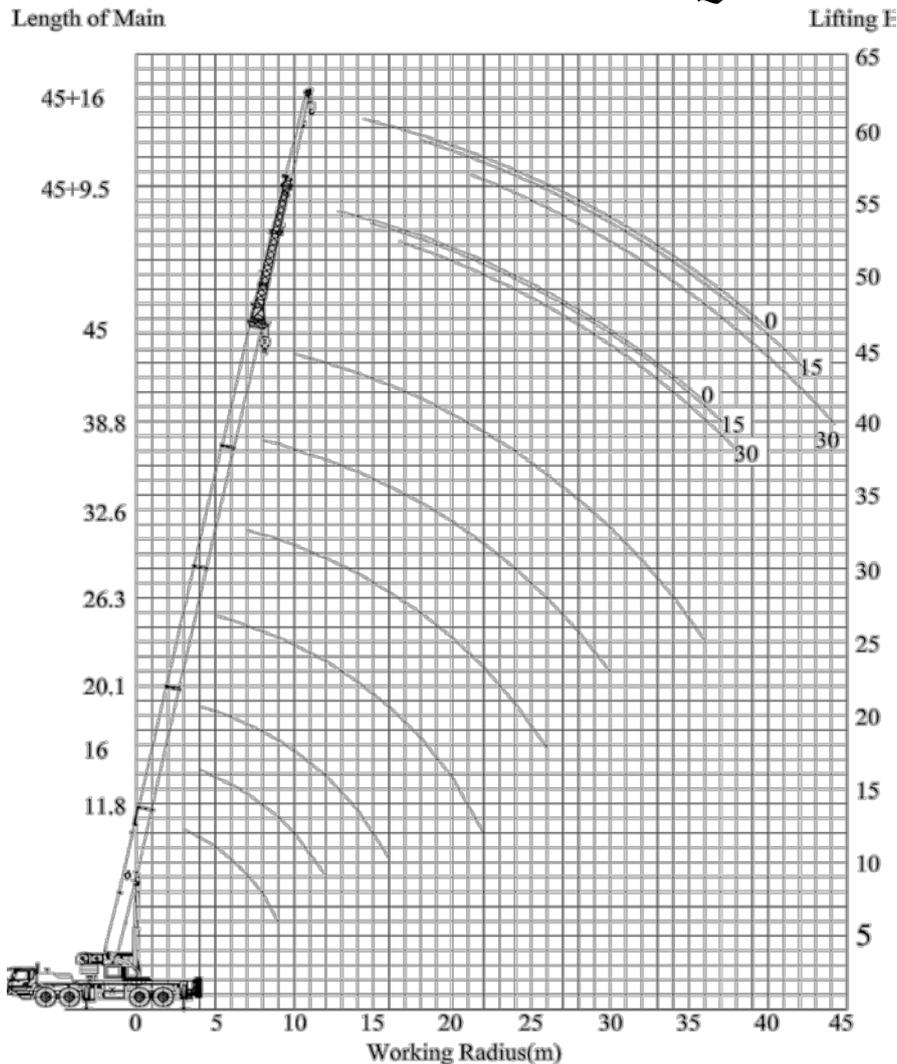


Tabela de Cargas - Lança Principal (Contrapeso 7,35t)
Patoja totalmente estendida, Utilizar a quinta patoja para trabalhos na dianteira do caminhão

Amplitude de Trabalho	11.8m			16.0m			20.1m			26.3m			32.6m			38.8m			45m			
	Carga	Ângulo	Altura de Içamento																			
	kg	°	m																			
3	75000	70	12.4																			
3.5	70000	67	12.2																			
4	62700	64	11.9	51450	72	16.6	43350	76	20.9													
5	51300	59	11.3	45100	68	16.1	40000	73	20.6	30850	78	27.1										
6	45600	53	10.5	39300	64	15.6	35500	70	20.2	27950	76	26.8										
7	37300	46	9.5	34200	60	15	30400	67	19.7	25480	73	26.5	20350	77	33.1							
8	28700	38	8.2	28000	56	14.3	26400	64	19.2	22750	71	26.1	18450	75	32.8	14700	79	39.2				
9	23000	28	6.4	22400	51	13.5	22100	61	18.6	20300	69	25.7	16850	74	32.4	14500	77	39				
10				18500	46	12.5	18100	57	17.9	18450	66	25.2	15200	72	32.1	13700	75	38.7	10300	78	45.1	
12				13200	34	9.7	12900	50	16.3	13800	61	24.1	12600	68	31.2	11700	72	38	9400	76	44.5	
14							9600	41	14.1	10400	56	22.7	10600	64	30.2	9600	69	37.1	8550	73	43.9	
16							7300	28	11.6	8100	50	21	8600	60	29	8550	66	36.2	8000	70	43	
18										6500	44	19	6900	56	27.6	7200	62	35.1	7000	67	42.1	
20										5200	37	16.4	5600	51	25.9	5900	59	33.8	6200	64	41.1	
22										4100	28	12.8	4600	46	23.9	4900	55	32.3	5100	61	39.9	
24													3700	41	21.6	4000	51	30.7	4300	58	38.6	
26													3000	34	18.7	3300	47	28.7	3600	55	37.1	
28																2700	43	26.5	3000	52	35.4	
30																2200	38	23.9	2500	48	33.5	
32																			2000	45	31.4	
34																			1700	41	28.9	
36																			1300	36	26.1	
LINHAS DE CABO	12			9			8			6			4			3			3			

Moitão

Principal : 616 Intermediário : 370

Tabela de Cargas – Lança Auxiliar JIB

Contrapeso 7.35t, Patoja totalmente estendida 7.6m, Sem quinta patoja,